

Please type a plus sign (+) inside this box → ☐

PTO/SB/05 (12/97)
Approved for use through 09/30/00. OMB 0651-0032
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No.

K35A0652

Total Pages

First Named Inventor or Application Identifier

ANDREW D. HOSPODOR

Express Mail Label No.

EK995292703US

APPLICATION ELEMENTS
See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO: Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

1. ☒ Fee Transmittal Form
(Submit an original, and a duplicate for fee processing)
 2. ☒ Specification [Total Pages (preferred arrangement set forth below)
 - Descriptive title of the Invention
 - Cross References to Related Applications
 - Statement Regarding Fed sponsored R & D
 - Reference to Microfiche Appendix
 - Background of the Invention
 - Brief Summary of the Invention
 - Brief Description of the Drawings (if filed)
 - Detailed Description
 - Claim(s)
 - Abstract of the Disclosure
 3. ☒ Drawing(s) (35 USC 113) [Total Sheets X_ Formal ___ Informal
 4. ☐ Oath or Declaration [Total Pages - a. ☒ Newly executed (original or copy)
 - b. ☐ Copy from a prior application (37 CFR 1.63(d))
(for continuation/divisional with Box 17 completed)
[Note Box 5 below]
 - i. ☐ DELETION OF INVENTOR(S)
Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation By Reference (useable if Box 4b is checked)
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.

6. ☐ Microfiche Computer Program (Appendix)
7. Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)
 - a. ☐ Computer Readable Copy
 - b. ☐ Paper Copy (identical to computer copy)
 - c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

8. ☐ Assignment Papers (cover sheet & document(s))
9. ☐ 37 CFR 3.73(b) Statement (when there is an assignee) ☐ Power of Attorney
10. ☐ English Translation Document (if applicable)
11. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)
14. ☐ Small Entity ☐ Statement filed in prior application, Status still proper and desired
15. ☐ Certified Copy of Priority Document(s) (if foreign priority is claimed)
16. ☒ Other: Bibliographic Data

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No: _____/_____

18. CORRESPONDENCE ADDRESS

☐ Customer Number or Bar Code Label

or ☒ Correspondence address below


(Insert Customer No. or Attach bar code label here)

NAME	WESTERN DIGITAL CORPORATION				
	Milad G. Shara, Esq. - Reg. 39,367 <i>[Signature]</i> 8/28/00				
ADDRESS	8105 IRVINE CENTER DRIVE				
	PLAZA 3				
CITY	IRVINE	STATE	CALIFORNIA	ZIP CODE	92618
COUNTRY	U.S.A.	TELEPHONE	(949) 932-5676	FAX	(949) 932-5633

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

FEE TRANSMITTAL <i>Note: Effective October 1, 1997. Patent fees are subject to annual revision.</i>		Complete if Known		
		Application Number	UNKNOWN	
		Filing Date	Herewith	
		First Named Inventor	ANDREW D. HOSPODOR	
		Group Art Unit	UNKNOWN	
		Examiner Name	UNKNOWN	
TOTAL AMOUNT OF PAYMENT (\$)		852.00	Attorney Docket Number	K35A0652

METHOD OF PAYMENT (check one)		FEE CALCULATION (continued)																																																																																																																											
1. <input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge indicated fees and credit any over payments to: Deposit Account Number: 23-1209 Deposit Account Name: WESTERN DIGITAL CORPORATION <input checked="" type="checkbox"/> Charge Any Additional Fee Required Under 37 CFR 1.16 and 1.17 <input type="checkbox"/> Charge the Issue Fee Set in 37 CFR 1.18 at the Mailing of the Notice of Allowance		3. ADDITIONAL FEES																																																																																																																											
2. <input type="checkbox"/> Payment Enclosed: <input type="checkbox"/> Check <input type="checkbox"/> Money Order <input type="checkbox"/> Other		<table border="1"><thead><tr><th>Large Entity Fee Code (\$)</th><th>Small Entity Fee Code (\$)</th><th>Fee Description</th><th>Fee Paid</th></tr></thead><tbody><tr><td>105 130</td><td>205 65</td><td>Surcharge - late filing fee or oath</td><td></td></tr><tr><td>127 50</td><td>227 25</td><td>Surcharge - late provisional filing fee or cover sheet.</td><td></td></tr><tr><td>139 130</td><td>139 130</td><td>Non-English specification</td><td></td></tr><tr><td>147 2,520</td><td>147 2,520</td><td>For filing a request for reexamination</td><td></td></tr><tr><td>112 920*</td><td>112 920*</td><td>Requesting publication of SIR prior to Examiner action</td><td></td></tr><tr><td>113 1,840*</td><td>113 1,840*</td><td>Requesting publication of SIR after Examiner action</td><td></td></tr><tr><td>115 110</td><td>215 55</td><td>Extension for reply within first month</td><td></td></tr><tr><td>116 380</td><td>216 190</td><td>Extension for reply within second month</td><td></td></tr><tr><td>117 870</td><td>217 435</td><td>Extension for reply within third month</td><td></td></tr><tr><td>118 1,360</td><td>218 680</td><td>Extension for reply within fourth month</td><td></td></tr><tr><td>128 1,850</td><td>228 925</td><td>Extension for reply within fifth month</td><td></td></tr><tr><td>119 300</td><td>219 150</td><td>Notice of Appeal</td><td></td></tr><tr><td>120 300</td><td>220 150</td><td>Filing a brief in support of an appeal</td><td></td></tr><tr><td>121 260</td><td>221 130</td><td>Request for oral hearing</td><td></td></tr><tr><td>138 1,510</td><td>138 1,510</td><td>Petition to institute a public use proceeding</td><td></td></tr><tr><td>140 110</td><td>240 55</td><td>Petition to revive - unavoidable</td><td></td></tr><tr><td>141 1,210</td><td>241 660</td><td>Petition to revive - unintentional</td><td></td></tr><tr><td>142 1,210</td><td>242 605</td><td>Utility issue fee (or reissue)</td><td></td></tr><tr><td>143 430</td><td>243 215</td><td>Design issue fee</td><td></td></tr><tr><td>144 580</td><td>244 290</td><td>Plant issue fee</td><td></td></tr><tr><td>122 130</td><td>122 130</td><td>Petitions to the Commissioner</td><td></td></tr><tr><td>123 50</td><td>123 50</td><td>Petitions related to provisional applications</td><td></td></tr><tr><td>126 240</td><td>126 240</td><td>Submission of Information Disclosure Stmt</td><td></td></tr><tr><td>581 40</td><td>581 40</td><td>Recording each patent assignment per property (times number of properties)</td><td></td></tr><tr><td>146 690</td><td>246 345</td><td>Filing a submission after final rejection (37 CFR 1.129(a))</td><td></td></tr><tr><td>149 690</td><td>249 345</td><td>For each additional invention to be examined (37 CFR 1.129(b))</td><td></td></tr><tr><td colspan="2">Other fee (specify) _____</td><td colspan="2"></td></tr><tr><td colspan="2">Other fee (specify) _____</td><td colspan="2"></td></tr><tr><td colspan="2">* Reduced by Basic Filing Fee Paid</td><td colspan="2">SUBTOTAL (3) (\$)</td></tr></tbody></table>				Large Entity Fee Code (\$)	Small Entity Fee Code (\$)	Fee Description	Fee Paid	105 130	205 65	Surcharge - late filing fee or oath		127 50	227 25	Surcharge - late provisional filing fee or cover sheet.		139 130	139 130	Non-English specification		147 2,520	147 2,520	For filing a request for reexamination		112 920*	112 920*	Requesting publication of SIR prior to Examiner action		113 1,840*	113 1,840*	Requesting publication of SIR after Examiner action		115 110	215 55	Extension for reply within first month		116 380	216 190	Extension for reply within second month		117 870	217 435	Extension for reply within third month		118 1,360	218 680	Extension for reply within fourth month		128 1,850	228 925	Extension for reply within fifth month		119 300	219 150	Notice of Appeal		120 300	220 150	Filing a brief in support of an appeal		121 260	221 130	Request for oral hearing		138 1,510	138 1,510	Petition to institute a public use proceeding		140 110	240 55	Petition to revive - unavoidable		141 1,210	241 660	Petition to revive - unintentional		142 1,210	242 605	Utility issue fee (or reissue)		143 430	243 215	Design issue fee		144 580	244 290	Plant issue fee		122 130	122 130	Petitions to the Commissioner		123 50	123 50	Petitions related to provisional applications		126 240	126 240	Submission of Information Disclosure Stmt		581 40	581 40	Recording each patent assignment per property (times number of properties)		146 690	246 345	Filing a submission after final rejection (37 CFR 1.129(a))		149 690	249 345	For each additional invention to be examined (37 CFR 1.129(b))		Other fee (specify) _____				Other fee (specify) _____				* Reduced by Basic Filing Fee Paid		SUBTOTAL (3) (\$)	
Large Entity Fee Code (\$)	Small Entity Fee Code (\$)	Fee Description	Fee Paid																																																																																																																										
105 130	205 65	Surcharge - late filing fee or oath																																																																																																																											
127 50	227 25	Surcharge - late provisional filing fee or cover sheet.																																																																																																																											
139 130	139 130	Non-English specification																																																																																																																											
147 2,520	147 2,520	For filing a request for reexamination																																																																																																																											
112 920*	112 920*	Requesting publication of SIR prior to Examiner action																																																																																																																											
113 1,840*	113 1,840*	Requesting publication of SIR after Examiner action																																																																																																																											
115 110	215 55	Extension for reply within first month																																																																																																																											
116 380	216 190	Extension for reply within second month																																																																																																																											
117 870	217 435	Extension for reply within third month																																																																																																																											
118 1,360	218 680	Extension for reply within fourth month																																																																																																																											
128 1,850	228 925	Extension for reply within fifth month																																																																																																																											
119 300	219 150	Notice of Appeal																																																																																																																											
120 300	220 150	Filing a brief in support of an appeal																																																																																																																											
121 260	221 130	Request for oral hearing																																																																																																																											
138 1,510	138 1,510	Petition to institute a public use proceeding																																																																																																																											
140 110	240 55	Petition to revive - unavoidable																																																																																																																											
141 1,210	241 660	Petition to revive - unintentional																																																																																																																											
142 1,210	242 605	Utility issue fee (or reissue)																																																																																																																											
143 430	243 215	Design issue fee																																																																																																																											
144 580	244 290	Plant issue fee																																																																																																																											
122 130	122 130	Petitions to the Commissioner																																																																																																																											
123 50	123 50	Petitions related to provisional applications																																																																																																																											
126 240	126 240	Submission of Information Disclosure Stmt																																																																																																																											
581 40	581 40	Recording each patent assignment per property (times number of properties)																																																																																																																											
146 690	246 345	Filing a submission after final rejection (37 CFR 1.129(a))																																																																																																																											
149 690	249 345	For each additional invention to be examined (37 CFR 1.129(b))																																																																																																																											
Other fee (specify) _____																																																																																																																													
Other fee (specify) _____																																																																																																																													
* Reduced by Basic Filing Fee Paid		SUBTOTAL (3) (\$)																																																																																																																											
1. FILING FEE <table border="1"><thead><tr><th>Large Entity Fee Code (\$)</th><th>Small Entity Fee Code (\$)</th><th>Fee Description</th><th>Fee Paid</th></tr></thead><tbody><tr><td>101 690</td><td>201 345</td><td>Utility filing fee</td><td>690.00</td></tr><tr><td>106 310</td><td>206 155</td><td>Design filing fee</td><td></td></tr><tr><td>107 480</td><td>207 240</td><td>Plant filing fee</td><td></td></tr><tr><td>108 690</td><td>208 345</td><td>Reissue filing fee</td><td></td></tr><tr><td>114 150</td><td>214 75</td><td>Provisional filing fee</td><td></td></tr><tr><td colspan="3">SUBTOTAL (1) (\$)</td><td>690.00</td></tr></tbody></table>		Large Entity Fee Code (\$)	Small Entity Fee Code (\$)	Fee Description	Fee Paid	101 690	201 345	Utility filing fee	690.00	106 310	206 155	Design filing fee		107 480	207 240	Plant filing fee		108 690	208 345	Reissue filing fee		114 150	214 75	Provisional filing fee		SUBTOTAL (1) (\$)			690.00																																																																																																
Large Entity Fee Code (\$)	Small Entity Fee Code (\$)	Fee Description	Fee Paid																																																																																																																										
101 690	201 345	Utility filing fee	690.00																																																																																																																										
106 310	206 155	Design filing fee																																																																																																																											
107 480	207 240	Plant filing fee																																																																																																																											
108 690	208 345	Reissue filing fee																																																																																																																											
114 150	214 75	Provisional filing fee																																																																																																																											
SUBTOTAL (1) (\$)			690.00																																																																																																																										
2. CLAIMS <table border="1"><thead><tr><th>Total Claims</th><th>Extra</th><th>Fee from below</th><th>Fee Paid</th></tr></thead><tbody><tr><td>29</td><td>-20 = 9</td><td>X 18</td><td>= 162.00</td></tr><tr><td>3</td><td>-3 = 0</td><td>X 78</td><td>= 0.00</td></tr><tr><td colspan="3">Multiple Dependent Claims</td><td></td></tr></tbody></table> <table border="1"><thead><tr><th>Large Entity Fee Code (\$)</th><th>Small Entity Fee Code (\$)</th><th>Fee Description</th></tr></thead><tbody><tr><td>103 18</td><td>203 9</td><td>Claims in excess of 20</td></tr><tr><td>102 78</td><td>202 39</td><td>Independent claims in excess of 3</td></tr><tr><td>104 260</td><td>204 130</td><td>Multiple dependent claim</td></tr><tr><td>109 78</td><td>209 39</td><td>Reissue independent claims over original patent</td></tr><tr><td>110 18</td><td>210 9</td><td>Reissue claims in excess of 20 and over original patent</td></tr></tbody></table> SUBTOTAL (2) (\$) 162.00		Total Claims	Extra	Fee from below	Fee Paid	29	-20 = 9	X 18	= 162.00	3	-3 = 0	X 78	= 0.00	Multiple Dependent Claims				Large Entity Fee Code (\$)	Small Entity Fee Code (\$)	Fee Description	103 18	203 9	Claims in excess of 20	102 78	202 39	Independent claims in excess of 3	104 260	204 130	Multiple dependent claim	109 78	209 39	Reissue independent claims over original patent	110 18	210 9	Reissue claims in excess of 20 and over original patent																																																																																										
Total Claims	Extra	Fee from below	Fee Paid																																																																																																																										
29	-20 = 9	X 18	= 162.00																																																																																																																										
3	-3 = 0	X 78	= 0.00																																																																																																																										
Multiple Dependent Claims																																																																																																																													
Large Entity Fee Code (\$)	Small Entity Fee Code (\$)	Fee Description																																																																																																																											
103 18	203 9	Claims in excess of 20																																																																																																																											
102 78	202 39	Independent claims in excess of 3																																																																																																																											
104 260	204 130	Multiple dependent claim																																																																																																																											
109 78	209 39	Reissue independent claims over original patent																																																																																																																											
110 18	210 9	Reissue claims in excess of 20 and over original patent																																																																																																																											

SUBMITTED BY				Complete (if applicable)	
Typed or Printed Name	Milad G. Shara, Esq.			Reg. Number	39,367
Signature				Deposit Account User ID	
	Date	9/24/00			

Inventor Information

Inventor One Given Name :: Andrew D.
Family Name :: Hospodor
Name Suffix :: N/A
Postal Address Line One:: P.O. Box 1196
City :: Los Gatos
State/Province :: CA
Country :: USA
Postal or Zip Code :: 95031-1196
City of Residence :: Los Gatos
Citizenship :: USA

Inventor Two Given Name :: MICHAEL K.
Family Name :: ENEBOE
Name Suffix :: N/A
Postal Address Line One:: 5379 RUCKER DR.
City :: SAN JOSE
State/Province :: CA
Country :: USA
Postal or Zip Code :: 95124
City of Residence :: SAN JOSE
Citizenship :: USA

Correspondence Information

Name Line One :: Milad G. Shara, Esq.
Name Line Two :: Western Digital Corporation
Address Line One :: Plaza 3
Address Line Two :: 8105 Irvine Center Drive
City :: Irvine
State/Province :: California
Country :: USA
Postal or Zip Code :: 92618
Telephone :: (949) 932-5676
Fax :: (949) 932-5633
E-Mail :: Milad.G.Shara@wdc.com

Application Information

Title Line One :: DISTRIBUTED RESOURCE RESERVATION SYSTEM FOR ESTABLISHING A PATH THROUGH
Title Line Two:: A MULTI-DIMENSIONAL COMPUTER NETWORK TO SUPPORT ISOCHRONOUS DATA
Total Drawing Sheets:: 8
Formal Drawings :: Yes
Application Type :: Utility
Docket Number :: K35A0652
Licensed - U S Government Agency :: N/A
Contract Number :: N/A
Grant Number :: N/A
Secrecy Order in Parent Application :: N/A

Representative Information

Representative Customer Number One:: Milad G. Shara, Esq.
Registration Number One :: 39,367
Representative Customer Number Two:: Howard H. Sheerin, Esq.
Registration Number Two:: 37,938

**DISTRIBUTED RESOURCE RESERVATION SYSTEM FOR ESTABLISHING A
PATH THROUGH A MULTI-DIMENSIONAL COMPUTER NETWORK TO SUPPORT
ISOCHRONOUS DATA**

CROSS REFERENCE TO RELATED APPLICATIONS AND PATENTS

This application is related to co-pending patent application serial no. 09/542,954 entitled "METHOD FOR DESIGNATING ONE OF A PLURALITY OF ADDRESSABLE STORAGE DEVICES TO PROCESS A DATA TRANSFER REQUEST" filed on 3/31/2000, the disclosure of which is incorporated herein by reference.

BACKGROUND OF THE INVENTION

Field of the Invention

The present invention relates to computer networks. More particularly, the present invention relates to a distributed resource reservation system for establishing a path through a multi-dimensional computer network to support isochronous data.

Description of the Prior Art

Establishing a path through a network to handle isochronous traffic has in the past been managed by a central routing processor which evaluates the state of the network and reserves resources in a path from a destination to source node. The resources are reserved in a manner that guarantees a delivery time for the isochronous data. However, the central processor may require a significant amount of memory and processing power to evaluate the network and reserve resources to establish paths in an efficient and timely manner. Further, as the network grows, so must the memory and processing capabilities of the central server. Thus, centrally managed schemes do not scale well.

The Resource Reservation Protocol or RSVP protocol is a prior art method for reserving resources to support isochronous traffic in a network wherein the resource reservation facility is

distributed throughout the nodes of the network (see the Resource Reservation Protocol or RSVP an overview for which is provided in the text book *Managing Bandwidth - Deploying QOS in Enterprise Networks*, by Alistair Croll and Eric Packman, Prentice Hall, Upper Saddle River, NJ, 1999; and "Resource Reservation Protocol (RSVP) -- Version 1 Functional Specification", Braden, R., Zhang, L., Berson, S., Herzog, S., Jamin, S., RFC 2205, September 1997, Proposed Standard).. The RSVP protocol is illustrated in FIG. 1A which shows a prior art tree network comprising a plurality of nodes wherein a destination node reserves resources in a path toward a source node. In FIG. 1A, node 4A sends a request packet into the network 2 to receive isochronous data from node 4D. As the request packet travels through the network 2, each node in the path (e.g., node 4B and 4C) determines whether it has sufficient resources to service the request and then reserves the resources. FIG. 1B shows a scenario when node 4C cannot service a request from node 4A due to resources having already been reserved to service a request from node 4E. Node 4C sends a reply message to node 4A indicating that the request cannot be serviced. Node 4A must then wait until node 4C has regained sufficient resources to service the request (e.g., when node 4E relinquishes the resources reserved in node 4C). This blocking characteristic of busses and tree networks implementing the RSVP protocol can reduce the aggregate performance of the network, particularly during high traffic periods.

There is, therefore, a need to establish paths for isochronous data in a computer network in a cost effective manner which scales efficiently with the size of the computer network and which avoids the blocking characteristic of the RSVP protocol.

SUMMARY OF THE INVENTION

The present invention may be regarded as a distributed method of establishing a path in a multi-dimensional computer network comprising a plurality of nodes for transmitting isochronous data from a source node to a destination node. A request packet is injected into the network, the request packet specifying a request to transmit the isochronous data from one of a plurality of source nodes. The request packet is routed to at least one of the plurality of source nodes, and the source node determines whether it has sufficient resources to support transmitting

1 the isochronous data. If the source node comprises sufficient resources to support transmitting
2 the isochronous data, the source node reserves resources within the source node to support
3 transmitting the isochronous data, and transmits an acknowledge (ack) packet from the source
4 node to a first neighboring node. The first neighboring node determines whether it has sufficient
5 resources to support transmitting the isochronous data. If the first neighboring node comprises
6 sufficient resources to support transmitting the isochronous data, the first neighboring node
7 reserves resources within the first neighboring node to support transmitting the isochronous data,
8 and transmits the ack packet to an adjacent node. If the first neighboring node does not comprise
9 sufficient resources to support transmitting the isochronous data, the first neighboring node
10 transmits a negative-acknowledge (nack) packet to the source node and the source node transmits
11 the ack packet to a second neighboring node.

12 In one embodiment, the resources reserved within a node comprises memory for
13 buffering data, and in another embodiment the resources comprises network communication
14 circuitry, such as a virtual lane in switching circuitry.

15 In another embodiment, the resources are reserved within a node for a specified "lease"
16 period, after which time the resources are automatically relinquished. In yet another
17 embodiment, the resources are automatically relinquished if they remain idle for a specified
18 "time-out" period.

19 In still another embodiment, the request is routed from the destination node to a plurality
20 of source nodes and a method is employed to determine which source node will service the
21 request. In one embodiment, the request packet is transmitted to a primary source node, the
22 primary source node determines whether it has sufficient resources to service the request and, if
23 not, the primary source node transmits the request packet to a secondary source node. In another
24 embodiment, the request packet is multicast to a plurality of source nodes, at least two of the
25 source nodes reserves resources to support transmitting the isochronous data, and one of the
26 reservations is canceled when a path constructed from the source node encounters a path which
27 has already reserved resources to support transmitting the isochronous data.

The present invention may also be regarded as a switched node comprising switching circuitry including more than two bi-directional ports for simultaneously transmitting data in multiple dimensions through a computer network, wherein each bi-directional port comprises an input port and an output port. The switched node further comprises a data buffer for buffering data, routing circuitry for routing data stored in the data buffer to a selected output port, and a reservation facility for reserving resources within the switch node to support requests to transmit isochronous data. The switched node receives a request packet to reserve resources to support transmitting isochronous data. If the switched node comprises sufficient resources to support transmitting the isochronous data, the reservation facility reserves resources within the switched node to support transmitting the isochronous data, and the switched node transmits an ack packet to a first neighboring node. If the first neighboring node does not comprise sufficient resources to support transmitting the isochronous data, the switched node receives a nack packet from the first neighboring node, and the switched node transmits the ack packet to a second neighboring node.

In one embodiment, the switched node further comprises a disk for storing data and a head actuated over the disk for writing data to and reading data from the disk. In one embodiment, the reservation facility reserves resources associated with data read from the disk and written to the disk.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1A illustrates the prior art resource reservation protocol (RSVP) wherein each node in a network tree comprises reservation facilities for establishing isochronous data paths.

FIG. 1B illustrates how in the RSVP protocol a previously established path can block requests to create new paths.

FIG. 2A illustrates a distributed resource reservation system according to an embodiment of the present invention wherein a request to transmit isochronous data is sent to a source node in a multi-dimensional computer network.

FIG. 2B illustrates how the source node of FIG. 2A generates an acknowledge (ack)

1 packet which is transmitted back to the destination node along a path wherein resources are
2 reserved at each node to support transmission of the isochronous data.

3 FIG. 2C shows how a path is redirected around a node which does not have sufficient
4 resources to handle the isochronous data.

5 FIG. 2D shows how the path established in FIG. 2B is torn down by transmitting a
6 termination packet through the path from the source node to the destination node.

7 FIG. 3A shows an embodiment of the present invention wherein the request to receive the
8 isochronous data is forwarded to a secondary source node if a primary source node does not
9 comprise sufficient resources to service the request.

10 FIG. 3B shows the path established by the secondary source node of FIG. 3A used to
11 transmit the isochronous data.

12 FIG. 4A shows an embodiment of the present invention wherein the request to receive the
13 isochronous data is multicast to a plurality of nodes in the multi-dimensional computer network.

14 FIG. 4B shows two source nodes reserving resources through two paths toward the
15 destination node to support transmitting of the isochronous data.

16 FIG. 4C illustrates how one of the paths in FIG. 4B is torn down when a node is
17 encountered which has already reserved resources to support transmitting the isochronous data
18 through an alternative path.

19 FIG. 5 shows a switched node for use in a multi-dimensional switched fabric computer
20 network according to an embodiment of the present invention comprising a plurality of bi-
21 directional ports for simultaneously transmitting data in multiple dimensions, a data buffer for
22 buffering data, routing circuitry for routing the data from the data buffer to the appropriate output
23 ports, and a reservation facility for reserving resources within the switch node to support requests
24 to transmit isochronous data.

25 FIG. 6 shows the switched node of FIG. 5, further comprising a disk for storing data and
26 a head actuated over the disk for writing data to and reading data from the disk, and a reservation
27 facility for reserving resources associated with data read from the disk and written to the disk.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

FIGs. 2A-2C illustrates a distributed method of establishing a path in a multi-dimensional computer network 6 comprising a plurality of nodes for transmitting isochronous data from a source node 8 to a destination node 10 according to an embodiment of the present invention. A request packet 12 is injected into the network, the request packet 12 specifying a request to transmit the isochronous data from one of a plurality of source nodes. The request packet is routed to at least one of the plurality of source nodes 8, and the source node 8 determines whether it has sufficient resources to support transmitting the isochronous data. If the source node 8 comprises sufficient resources to support transmitting the isochronous data, the source node 8 reserves resources within the source node 8 to support transmitting the isochronous data, and transmits an acknowledge (ack) packet 14 from the source node 8 to a first neighboring node 16 as shown in FIG. 2B. The first neighboring node 16 determines whether it has sufficient resources to support transmitting the isochronous data. If the first neighboring node 16 comprises sufficient resources to support transmitting the isochronous data, the first neighboring node 16 reserves resources within the first neighboring node 16 to support transmitting the isochronous data, and transmits the ack packet 14 to an adjacent node 18. As shown in FIG. 2C, if the first neighboring node 16 does not comprise sufficient resources to support transmitting the isochronous data, the first neighboring node 16 transmits a negative-acknowledge (nack) packet 20 to the source node 8 and the source node 8 transmits the ack packet 14 to a second neighboring node 22.

In one embodiment, the request packet 12 specifies certain Quality-of-Service (QOS) constraints associated with the isochronous data (e.g., transmission latency and data rate). The nodes within the network 6 determine whether they have sufficient resources to support the QOS constraints. Once a path 24 has been established between the source node 8 and the destination node 10, the reserved resources guarantees that the isochronous data is transmitted through the path 24 in a manner that satisfies the specified QOS constraints.

In the embodiment of FIG. 2A, the request packet 12 is injected into the network 6 by the

1 destination node 10. In alternative embodiment, the request packet 12 may be injected into the
2 network 6 by a third party node which requests that the isochronous data be delivered to the
3 destination node 10.

4 When the source node 8 finishes transmitting the isochronous data to the destination node
5 10, the path 24 reserved for the data transfer is torn down by relinquishing the resources reserved
6 at each node through the path. In one embodiment illustrated in FIG. 2D, the source node 8
7 transmits a termination packet 26 through the path 24 after transmitting the last packet associated
8 with the isochronous data. As the termination packet 26 reaches each node in the path 24, the
9 nodes relinquish the resources reserved for the isochronous data.

10 In another embodiment, the destination node specifies a "lease" period for the resources
11 reserved within the nodes, and the resources are automatically relinquished when the lease period
12 expires. In yet another embodiment, a time-out period is associated with the resources reserved
13 within the nodes and the resources are automatically relinquished if they remain idle beyond the
14 time-out period. This embodiment prevents blocking of resources under failure conditions, such
15 as the source node 8, the destination node 10, or an intermediate node within the path failing. In
16 yet another embodiment, the destination node 10 may intentionally terminate the transmission
17 early by sending a termination packet through the path which also relinquishes the resources
18 reserved for the isochronous data.

19 FIG. 3A shows an embodiment of the present invention wherein the request packet 12 is
20 first transmitted to a primary source node 8 which determines whether it comprises sufficient
21 resources to support transmitting the isochronous data. If the primary source node 8 does not
22 comprise sufficient resources, then the request packet 12 is forwarded to a secondary node 26
23 comprising a replicate of the data stored on the primary source node 8. If the secondary node 26
24 has sufficient resources, then it sends an ack packet 30 through nodes in the network to establish
25 a path 32 for the isochronous data. In one embodiment, the primary source node 8 stores
26 information identifying the secondary source node 26 to which the request packet 12 is
27 forwarded. In an alternative embodiment, the request packet 12 comprises information

identifying the secondary source node 26.

FIG. 4A illustrates an embodiment of the present invention wherein the request packet 12 is multicast to a plurality of source nodes in the network attempting to find at least one source node comprising sufficient resources to support transmitting the isochronous data. In one embodiment shown in FIG. 4B, resources are reserved in multiple paths through the network. In the example of FIG. 4B, source nodes 8 and 26 both comprise sufficient resources to support transmitting the isochronous data. Both source nodes 8 and 26 reserve resources and begin to establish a first path and a second path toward the destination node 10 by transmitting a first ack packet 28 and a second ack packet 30 through the network. When the first ack packet 28 reaches a node 32 comprising resources already reserved to support transmitting the isochronous data through the second path, the resources reserved in the first path are relinquished. In one embodiment shown in FIG. 4C, the ack packet 28 is converted into a cancel packet 34 which is transmitted back toward the source node 26 relinquishing the resources reserved at each node. The isochronous data is then transmitted through the path 36 established by source node 8.

In an alternative embodiment, the request packet 12 is multicast to a plurality of source nodes and a facility is provided to select from the multiple source nodes that comprise sufficient resources to support transmitting the isochronous data. For example, the source nodes may communicate with one another or with a central processor to determine the most appropriate source node to service the request. The above reference co-pending patent application entitled "METHOD FOR DESIGNATING ONE OF A PLURALITY OF ADDRESSABLE STORAGE DEVICES TO PROCESS A DATA TRANSFER REQUEST " discloses further details of this embodiment.

FIG. 5 shows a switched node 40 for use in a multi-dimensional computer network according to an embodiment of the present invention. The switched node 40 comprises switching circuitry comprising more than two bi-directional ports for simultaneously transmitting data in multiple dimensions through the computer network, wherein each bi-directional port comprises an input port 42A-42D and an output port 44A-44D, a data buffer 46A-46D for

1 buffering data, routing circuitry for routing data stored in the data buffer to a selected output port
2 44A-44D, and a reservation facility 48A-48D for reserving resources within the switch node 40
3 to support requests to transmit isochronous data. The switched node 40 receives a request
4 packet to reserve resources to support transmitting isochronous data. If the switched node 40
5 comprises sufficient resources to support transmitting the isochronous data, the reservation
6 facility 48A-48D reserves resources within the switched node 40 to support transmitting the
7 isochronous data, and the switched node 40 transmits an ack packet to a first neighboring node.
8 If the first neighboring node does not comprise sufficient resources to support transmitting the
9 isochronous data, the switched node 40 receives a nack packet from the first neighboring node,
10 and the switched node 40 transmits the ack packet to a second neighboring node.

11 The switched node 40 of FIG. 5 is interconnected with a plurality of other switched nodes
12 such as shown in FIG. 2A to form a multi-dimensional switched fabric. Each of the switched
13 nodes in FIG. 2A comprises four bi-directional ports (North, East, South and West) forming a
14 two-dimensional fabric. In one embodiment, the network data transmitted through the switched
15 nodes consist of packets having a packet header comprising routing data which identifies the
16 source node for the packet. The packet headers are processed in order to route the packet through
17 the switched nodes. A suitable routing algorithm generates control data for configuring the
18 switched nodes in order to route the packets through the network. Any suitable routing
19 algorithm may be employed, and it may support Unicast, Multicast, or Broadcast delivery
20 mechanisms. The routing decisions may be made centrally, at the source, distributed, or
21 multiphase, implemented using a lookup table or using a finite-state machine. Further, the
22 routing algorithm may be deterministic or adaptive. A discussion of various routing algorithms
23 which may be employed in the embodiments of the present invention is provided by Jose Duato
24 et al. in the textbook "Interconnection Networks, an Engineering Approach", IEEE Computer
25 Society, 1997.

26 The routing algorithm is implemented a layer "above" the switching layer, and thus the
27 routing algorithm may be compatible with various different switching algorithms, for example,

Virtual Cut-Through Switching, Wormhole Switching, and Mad Postman Switching. In addition, topologies other than the two-dimensional switched fabric of FIG. 2A, as well as topologies comprising more than two dimensions, may be employed in the present invention by decreasing or increasing the number of bi-directional ports per switched node. Various topologies and switching algorithms which may be employed in the embodiments of the present invention are discussed in the aforementioned textbook by Jose Duato et al.

Referring again to FIG. 5, the bi-directional ports of the switched node 40 comprise four input ports 42A-42D and four output ports 44A-44D corresponding to the North, East, South and West ports shown in FIG. 2A. Data packets received from the input ports 42A-42D are buffered in FIFO buffers 50A-50D. A routing table 52 is configured by control data 54 which in one embodiment is generated by a central routing microprocessor. The routing table 52 generates control signals 56A-56D which configure multiplexers 58A-58D in order to route the data packets to appropriate data buffers 46A-46D associated with the output ports 44A-44D. In this manner, the data packets cross the switched node 40 immediately except for the delay of the FIFO buffer 50A-50D. The FIFO buffers 50A-50D provide buffering of input data in the event that the target data buffer 46 is full or busy receiving data from another of the input ports.

A scheduling facility 60A-60D is also provided within the switched node 40 which schedules the time when the data packets are to be transferred from the data buffers 46A-46D to the output ports 44A-44D. In one embodiment, the timing information for the packets are stored in the packet headers and processed by the scheduling facility 60A-60D. In one embodiment, the timing information implements an isochronous communication protocol such as disclosed in the in Texas Instruments' TSB12LV41A link-layer controller (LLC) which supports the IEEE 1394 specification for high-performance serial bus with automatic generation of the common isochronous packet headers and time stamping as required by the IEC 61883 standard.

In one embodiment, the data buffers 46A-46D comprise a plurality of virtual lanes where each virtual lane is assigned a predetermined priority level. The scheduling facility 60A-60D schedules the data packets according to the timing information by queuing the data packets in the

appropriate virtual lanes. For example, data packets with shorter transmission deadlines are queued in higher priority virtual lanes, whereas data packets with longer transmission deadlines are queued in lower priority virtual lanes. In addition, within a virtual lane the data packets can be queued in order of arrival (FIFO) or in order of departure based on the transmission deadlines in order to support predetermined QOS constraints. Details of departure queuing are disclosed by Jennifer Rexford, et al. in "A Router Architecture for Real-Time Communication in Multicomputer Networks", *IEEE Transactions on Computers*, Vol. 47, No. 10, October 1998, which is incorporated herein by reference.

In one embodiment, the reservation facility 48A-48D reserves one or more of the virtual lanes for transmitting isochronous data. In another embodiment, the reservation facility 48A-48D reserves memory in data buffers 46A-46D for transmitting isochronous data. In yet another embodiment, the reservation facility 48A-48D reserves processing circuitry used to implement the routing and scheduling operations within the switched node 40. In still another embodiment, the reservation facility 48A-48D reserves bandwidth of linking circuitry for linking the switched node 40 to other switched nodes in the computer network.

The switched node of 40 of FIG. 5 can be extended to add additional dimensionality by duplicating the circuitry associated with each bi-directional port (input port 42, FIFO 50, MUX 58, output port 44, etc.). In one embodiment, the switched node 40 is a commodity device which comprises a facility for dynamically configuring the bi-directional ports to support a desired switched fabric topology. Thus, a number of the input ports 42A-42D and/or a number of the output ports 44A-44D may be configured to connect to ports of other switched nodes, whereas the remaining ports may be left unconnected.

FIG. 6 shows a switched node 62 for use in a multi-dimensional computer network according to an alternative embodiment of the present invention wherein a disk 64a and a head 64b are integrated into the switched node 62 for storing isochronous data. The data packets received from the input ports 42A-42D may be routed to an input port 66 associated with the disk 64a and the head 64b, where the data is stored in data buffer 68, and ultimately written onto the

1 disk 64a. Data read from the disk 64a is also stored in the data buffer 68 and transmitted via
2 output port 70 to the appropriate data buffer 46A-46D.

3 In the embodiment of FIG. 6, the reservation facility 48A-48D within the switched node
4 62 reserves resources associated with the scheduling facility 60A-60D to support transmitting
5 isochronous data through the switched node 62, and a reservation facility 48E reserves resources
6 associated with a scheduling facility 60E to support isochronous data transmitted to and from the
7 disk 64a. The scheduling facility 60E also comprises additional resources for implementing the
8 interface between the data buffer 68 and the disk 64a. In one embodiment, the reservation
9 facility 48E reserves memory within the data buffer 68 to support writing isochronous data to the
10 disk 64a or to support reading isochronous data from the disk 64a. In yet another embodiment,
11 the reservation facility 48E limits movement of the head 64b with respect to the disk 64a so as to
12 constrain the head 64b to a predetermined region of the disk 64a, thereby reserving a resource
13 within the switched node 62.

14 In the embodiment shown in FIG. 2A, the switched nodes constituting the multi-
15 dimensional computer network 6 may or may not comprise a disk 64a and a head 64b as shown
16 in FIG. 6. In addition, in one embodiment a select number of the switched nodes comprise
17 adapter circuitry for connecting to an external entity (e.g., a client computer). In yet another
18 embodiment, a select number of the switched nodes comprise a microprocessor for implementing
19 a distributed routing algorithm.

WE CLAIM:

1. A distributed method of establishing a path in a multi-dimensional computer network comprising a plurality of nodes for transmitting isochronous data from a source node to a destination node, the method comprising the steps of:
 - (a) injecting a request packet into the network, the request packet specifying a request to transmit the isochronous data from one of a plurality of source nodes;
 - (b) routing the request packet to at least one of the plurality of source nodes;
 - (c) determining whether the source node comprises sufficient resources to support transmitting the isochronous data;
 - (d) if the source node comprises sufficient resources to support transmitting the isochronous data, reserving resources within the source node to support transmitting the isochronous data, and transmitting an acknowledge (ack) packet from the source node to a first neighboring node;
 - (e) determining whether the first neighboring node comprises sufficient resources to support transmitting the isochronous data;
 - (f) if the first neighboring node comprises sufficient resources to support transmitting the isochronous data, reserving resources within the first neighboring node to support transmitting the isochronous data, and transmitting the ack packet from the first neighboring node to a node adjacent the first neighboring node; and
 - (g) if the first neighboring node does not comprise sufficient resources to support transmitting the isochronous data:
transmitting a negative-acknowledge (nack) packet from the first neighboring node to the source node; and
transmitting the ack packet from the source node to a second neighboring node.
2. The distributed method of establishing a path in a multi-dimensional computer network as recited in claim 1, wherein the resources comprise memory for buffering data.

- 1 3. The distributed method of establishing a path in a multi-dimensional computer network
2 as recited in claim 1, wherein the resources comprise network communication circuitry.
- 1 4. The distributed method of establishing a path in a multi-dimensional computer network
2 as recited in claim 3, wherein:
- 3 (a) the network circuitry comprises multi-port switching circuitry comprising a plurality
4 of virtual lanes; and
- 5 (b) the resources comprise at least one of the virtual lanes.
- 1 5. The distributed method of establishing a path in a multi-dimensional computer network
2 as recited in claim 1, further comprising the step of routing the request packet to a
3 plurality of source nodes.
- 1 6. The distributed method of establishing a path in a multi-dimensional computer network
2 as recited in claim 5, wherein the step of routing the request packet to a plurality of
3 source nodes comprises the steps of:
- 4 (a) transmitting the request packet to a primary source node;
- 5 (b) determining whether the primary source node comprises sufficient resources to
6 support transmitting the isochronous data; and
- 7 (c) if the primary source node does not comprise sufficient resources to support
8 transmitting the isochronous data, forwarding the request packet to a secondary
9 source node.
- 1 7. The distributed method of establishing a path in a multi-dimensional computer network
2 as recited in claim 5, wherein the step of routing the request packet to a plurality of
3 source nodes further comprises the steps of:
- 4 (a) multicasting the request packet to the plurality of source nodes;
- 5 (b) determining whether each of the plurality of source nodes comprises sufficient
6 resources to support transmitting the isochronous data; and
- 7 (c) reserving resources in at least two of the plurality of source nodes to support
8 transmitting the isochronous data.

1 8. The distributed method of establishing a path in a multi-dimensional computer network
2 as recited in claim 7, further comprises the step of relinquishing the resources reserved in
3 one of the source nodes.

1 9. The distributed method of establishing a path in a multi-dimensional computer network
2 as recited in claim 5, wherein the step of routing the request packet to a plurality of
3 source nodes further comprises the steps of:

- 4 (a) multicasting the request packet to the plurality of source nodes;
- 5 (b) determining whether each of the plurality of source nodes comprises sufficient
6 resources to support transmitting the isochronous data;
- 7 (a) reserving resources in a first path of nodes between a first source node and the
8 destination node;
- 9 (b) reserving resources in a second path of nodes between a second source node and the
10 destination node; and
- 11 (c) relinquishing the resources reserved in the first path of nodes.

1 10. The distributed method of establishing a path in a multi-dimensional computer network
2 as recited in claim 8, further comprising the step of relinquishing the resources reserved
3 in the first path of nodes when a node is reached comprising resources reserved to support
4 transmitting the isochronous data through the second path of nodes.

1 11. The distributed method of establishing a path in a multi-dimensional computer network
2 as recited in claim 1, wherein the request packet comprises a lease period, further
3 comprising the step of relinquishing the reserved resources when the lease period expires.

1 12. The distributed method of establishing a path in a multi-dimensional computer network
2 as recited in claim 1, further comprising the steps of:
3 (a) associating a time-out period with the reserved resources; and
4 (b) automatically relinquishing the reserved resources if the reserved resources remain
5 idle beyond the time-out period.

- 1 13. A switched node for use in a multi-dimensional computer network, the switched node
2 comprising:
3 (a) switching circuitry comprising more than two bi-directional ports for simultaneously
4 transmitting data in multiple dimensions through the computer network, wherein each
5 bi-directional port comprises an input port and an output port;
6 (b) a data buffer for buffering data;
7 (c) routing circuitry for routing data stored in the data buffer to a selected output port;
8 and
9 (d) a reservation facility for reserving resources within the switch node to support
10 requests to transmit isochronous data,
11 wherein:
12 the switched node receives a request packet to reserve resources to support
13 transmitting isochronous data;
14 if the switched node comprises sufficient resources to support transmitting the
15 isochronous data, the reservation facility reserves resources within the switched
16 node to support transmitting the isochronous data, and the switched node
17 transmits an acknowledge (ack) packet to a first neighboring node;
18 if the first neighboring node does not comprise sufficient resources to support
19 transmitting the isochronous data, the switched node receives a negative-
20 acknowledge (nack) packet from the first neighboring node, and the switched
21 node transmits the ack packet to a second neighboring node.
- 1 14. The switched node as recited in claim 13, further comprising a disk for storing data and a
2 head actuated over the disk for writing data to and reading data from the disk.
- 1 15. The switched node as recited in claim 14, wherein the reservation facility reserves
2 resources associated with data read from the disk and written to the disk.
- 1 16. The switched node as recited in claim 13, wherein the request packet comprises a lease
2 period, and the switched node automatically relinquishes the reserved resources when the

3

1

2

3

4

1 18. A computer network comprising:

- 2 (a) a plurality of nodes for transmitting isochronous data from a source node to a
3 destination node;
4 (b) a request node for injecting a request packet into the network, the request packet
5 specifying a request to transmit the isochronous data from one of a plurality of source
6 nodes; and
7 (c) routing circuitry for routing the request packet to at least one of the plurality of source
8 nodes,

9 wherein:

10 the source node determines whether it comprises sufficient resources to support
11 transmitting the isochronous data;

12 if the source node comprises sufficient resources to support transmitting the
13 isochronous data, the source node reserves resources to support transmitting
14 the isochronous data, and transmits an acknowledge (ack) packet to a first
15 neighboring node;

16 the first neighboring node determines whether it comprises sufficient resources to
17 support transmitting the isochronous data;

18 if the first neighboring node comprises sufficient resources to support transmitting
19 the isochronous data, the first neighboring node reserves resources to support
20 transmitting the isochronous data, and transmits the ack packet to a node
21 adjacent the first neighboring node; and

22 if the first neighboring node does not comprise sufficient resources to support
23 transmitting the isochronous data:

24 the first neighboring node transmits a negative-acknowledge (nack) packet to
25 the source node; and

26 the source node transmits the ack packet to a second neighboring node.

1 19. The computer network as recited in claim 18, wherein the resources comprise memory for
2 buffering data.

1 20. The computer network as recited in claim 18, wherein the resources comprise network
2 communication circuitry.

1 21. The computer network as recited in claim 20, wherein:

- 2 (a) the network circuitry comprises multi-port switching circuitry comprising a plurality
3 of virtual lanes; and
4 (b) the resources comprise at least one of the virtual lanes.

1 22. The computer network as recited in claim 18, wherein the routing circuitry routes the
2 request packet to a plurality of source nodes.

1 23. The computer network as recited in claim 22, wherein:

- 2 (a) the routing circuitry transmits the request packet to a primary source node;
3 (b) the primary source node determines whether it comprises sufficient resources to
4 support transmitting the isochronous data; and
5 (c) if the primary source node does not comprise sufficient resources to support
6 transmitting the isochronous data, the primary source node forwards the request
7 packet to a secondary source node.

1 24. The computer network as recited in claim 22, wherein:

- 2 (a) the routing circuitry multicasting the request packet to the plurality of source nodes;
3 (b) each of the plurality of source nodes determines whether they comprises sufficient
4 resources to support transmitting the isochronous data; and
5 (c) at least two of the source nodes reserve resources to support transmitting the
6 isochronous data.

1 25. The computer network as recited in claim 24, wherein the resources reserved in one of the
2 source nodes are relinquished.

1 26. The computer network as recited in claim 22, wherein:

- 2 (a) the routing circuitry multicasting the request packet to the plurality of source nodes;

- 3 (b) each of the plurality of source nodes determines whether they comprises sufficient
4 resources to support transmitting the isochronous data;
5 (d) a first node reserves resources in a first path of nodes between the first source node
6 and the destination node;
7 (e) a second source node reserves resources in a second path of nodes between the second
8 source node and the destination node; and
9 (f) the resources reserved in the first path of nodes are relinquished.

1 27. The computer network as recited in claim 26, wherein the resources reserved in the first
2 path of nodes are relinquished when a node is reached comprising resources reserved to
3 support transmitting the isochronous data through the second path of nodes.



1 28. The computer network as recited in claim 18, wherein:
2 (a) the request packet comprises a lease period; and
3 (b) the reserved resources are automatically relinquished when the lease period expires.

1 29. The computer network as recited in claim 18, wherein:
2 (a) a time-out period is associated with the reserved resources; and
3 (b) the reserved resources are automatically relinquished if the reserved resources remain
4 idle beyond the time-out period.

**DISTRIBUTED RESOURCE RESERVATION SYSTEM FOR ESTABLISHING A
PATH THROUGH A MULTI-DIMENSIONAL COMPUTER NETWORK TO
SUPPORT ISOCHRONOUS DATA**

ABSTRACT OF THE DISCLOSURE

A distributed method of establishing a path in a multi-dimensional computer network comprising a plurality of nodes for transmitting isochronous data from a source node to a destination node is disclosed. A request packet is injected into the network, the request packet specifying a request to transmit the isochronous data from one of a plurality of source nodes. The request packet is routed to at least one the plurality of source nodes, and the source node determines whether it has sufficient resources to support transmitting the isochronous data. If the source node comprises sufficient resources to support transmitting the isochronous data, the source node reserves resources within the source node to support transmitting the isochronous data, and transmits an ack packet from the source node to a first neighboring node. The first neighboring node determines whether it has sufficient resources to support transmitting the isochronous data. If the first neighboring node comprises sufficient resources to support transmitting the isochronous data, the first neighboring node reserves resources within the first neighboring node to support transmitting the isochronous data, and transmits the ack packet to an adjacent node. If the first neighboring node does not comprise sufficient resources to support transmitting the isochronous data, the first neighboring node transmits a nack packet to the source node and the source node transmits the ack packet to a second neighboring node.

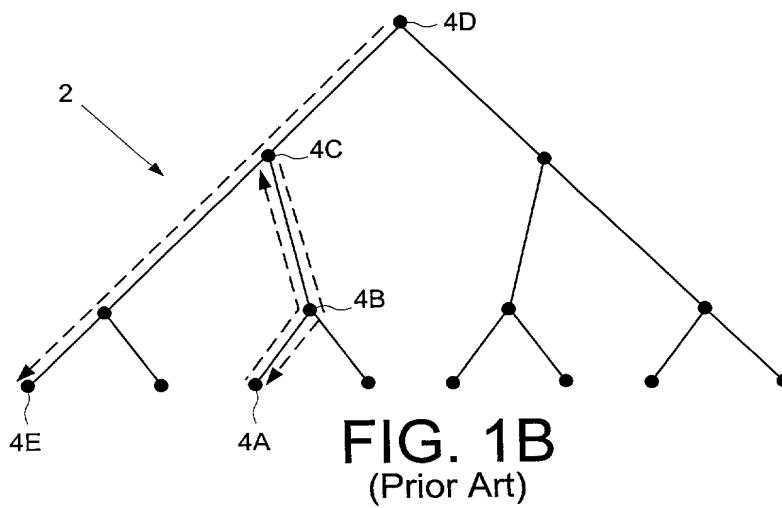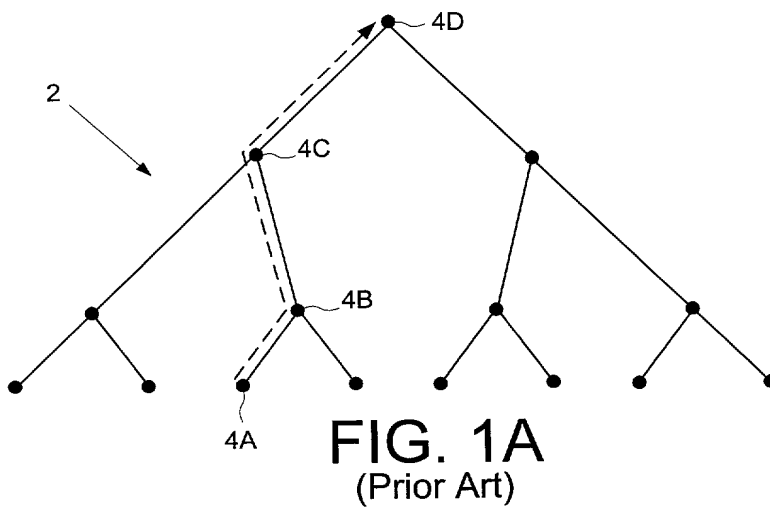

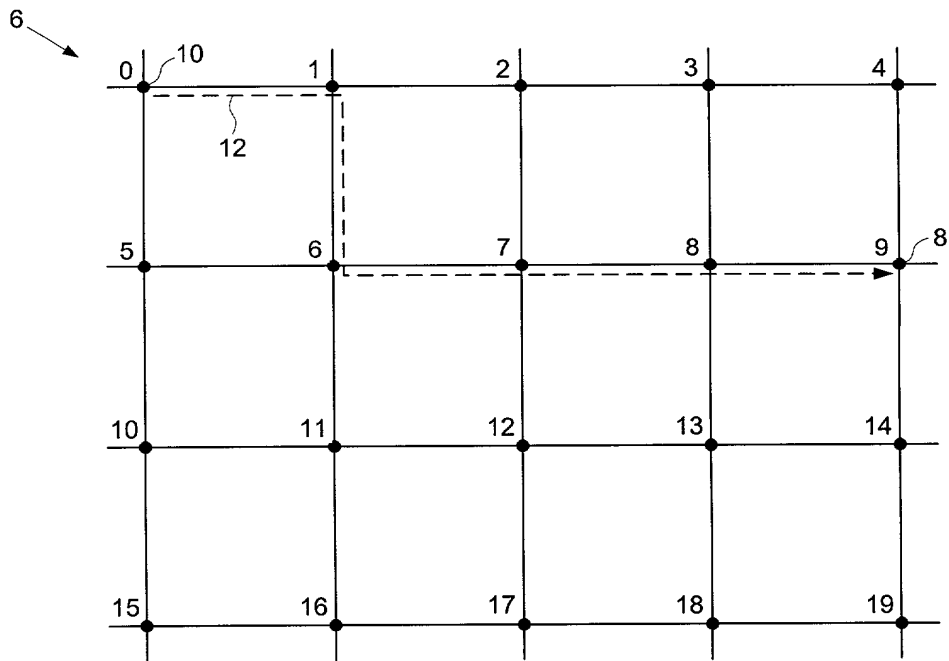


FIG. 2A

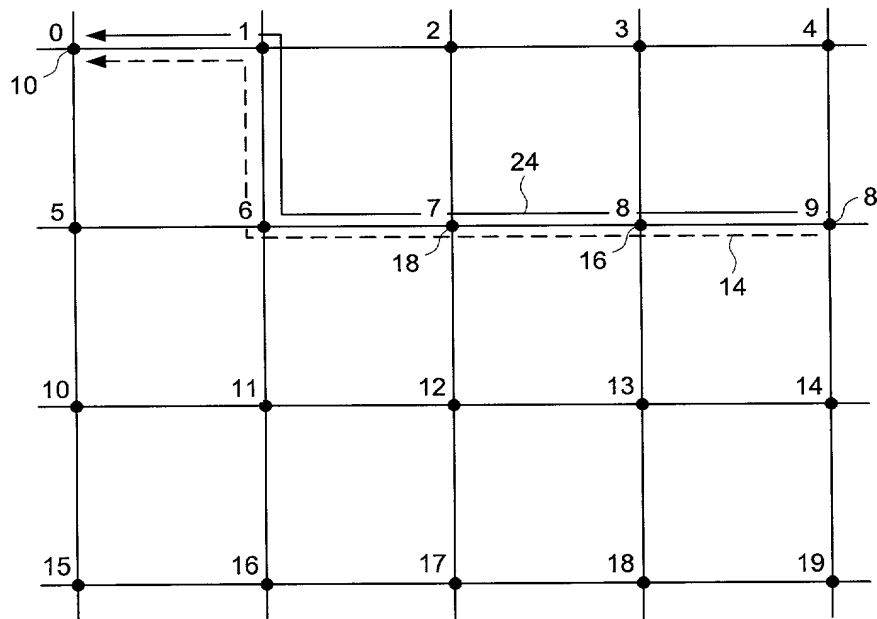


FIG. 2B

008260" 05857960

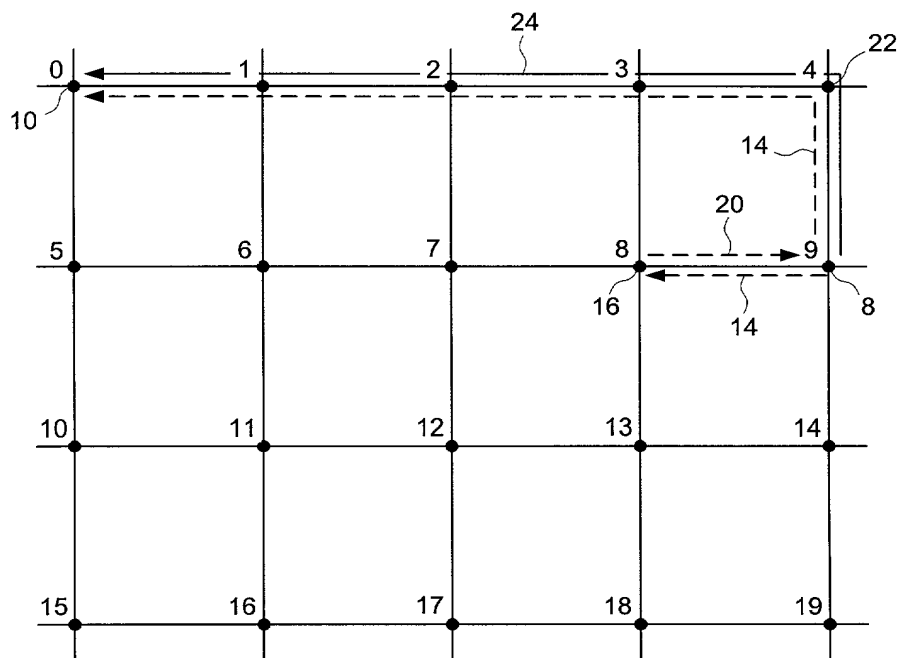


FIG. 2C

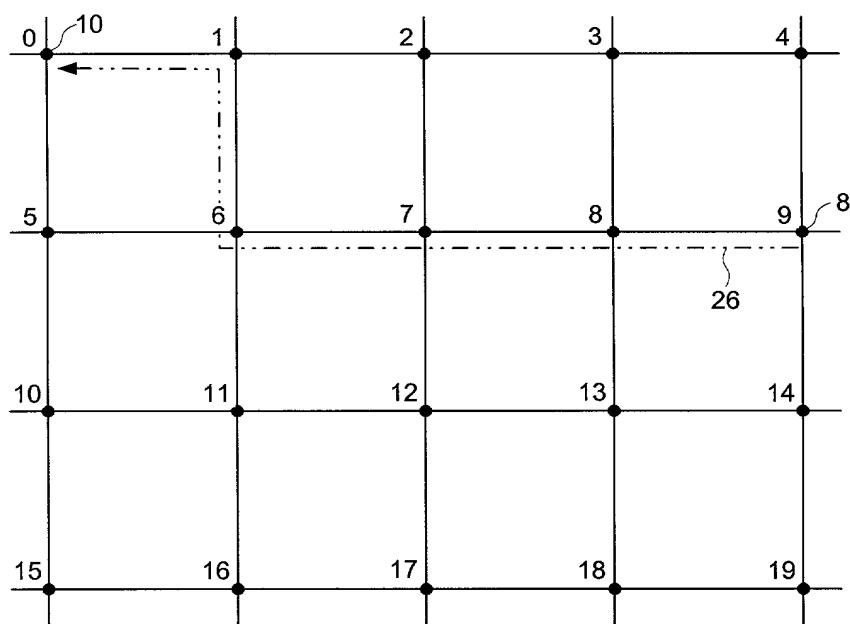


FIG. 2D

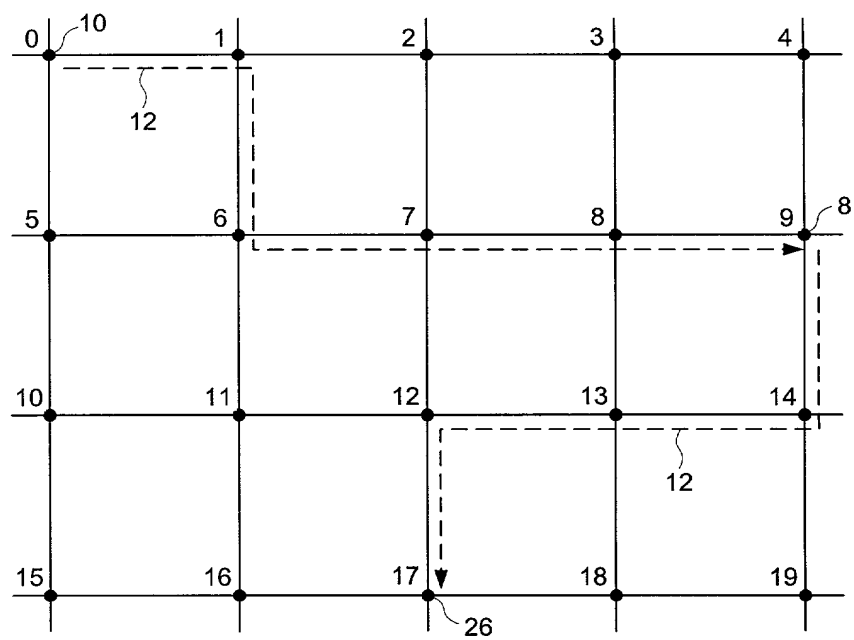


FIG. 3A

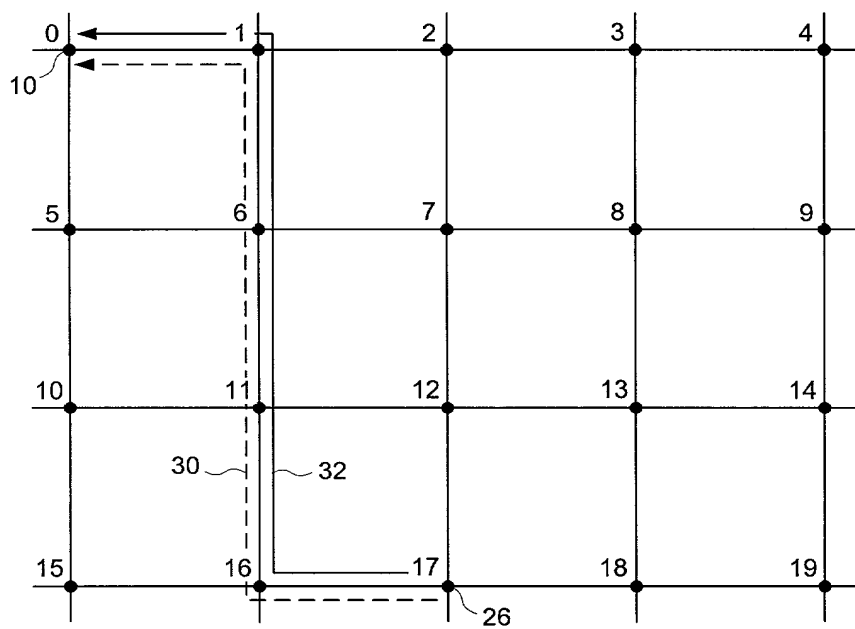


FIG. 3B

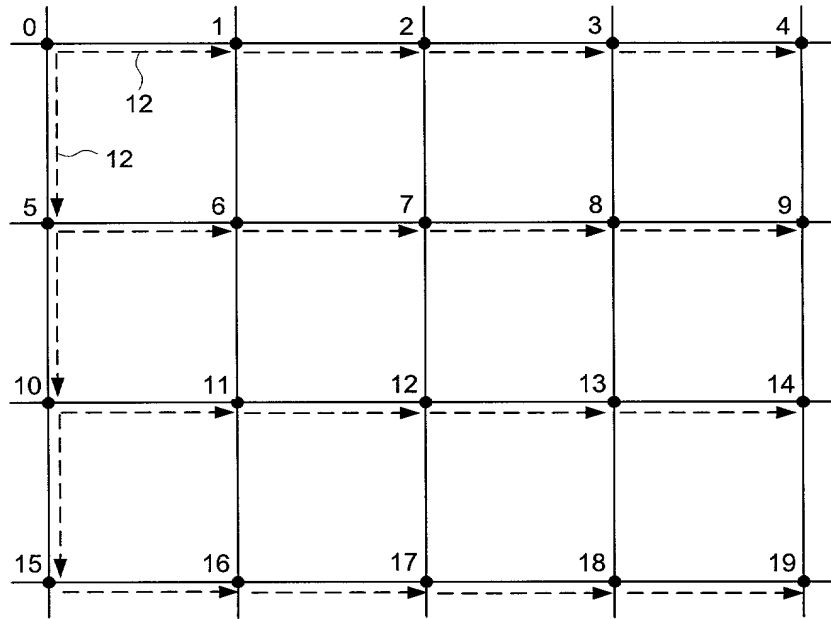


FIG. 4A

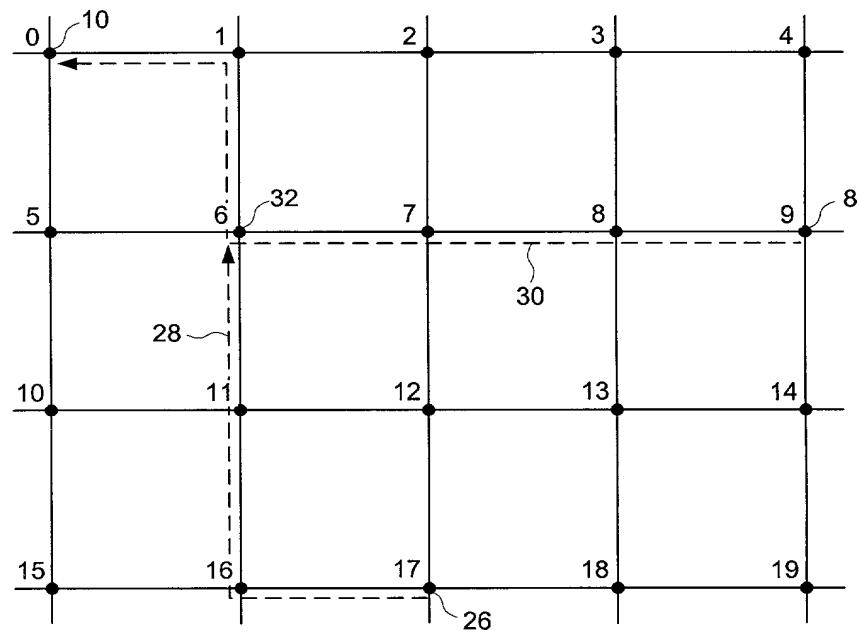


FIG. 4B

•

FIG. 4C

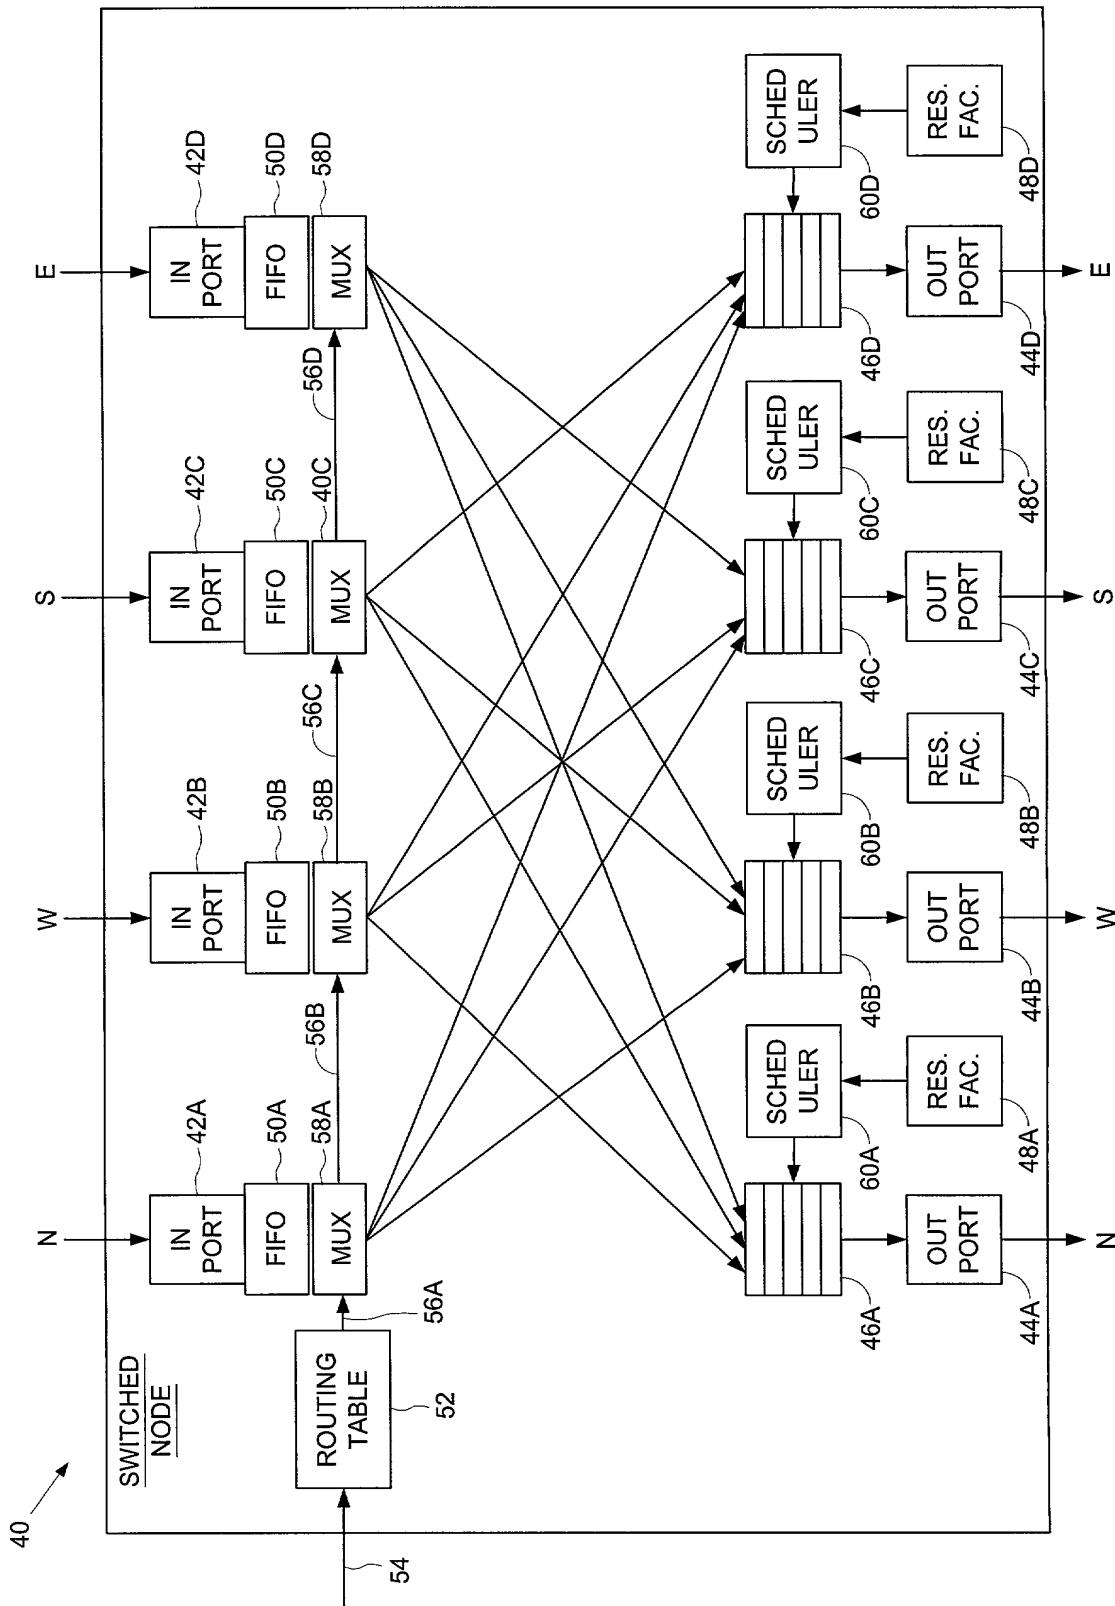


FIG. 5

Please type a plus sign (+) inside this box → ☐

PTO/SB/01 (12-97)
Approved for use through 9/30/00 OMB 0651-0032
Patent and Trademark Office; U S DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number

+

**DECLARATION FOR UTILITY OR
DESIGN
PATENT APPLICATION
(37 CFR 1.63)**

☒ Declaration Submitted with Initial Filing **OR** ☐ Declaration Submitted after Initial Filing (surcharge (37 CFR 1.16 (e)) required)

Attorney Docket Number	K35A0652
First Named Inventor	ANDREW D. HOSPODOR
COMPLETE IF KNOWN	
Application Number	/ Unknown
Filing Date	HEREWITH
Group Art Unit	Unknown
Examiner Name	Unknown

As a below named inventor, I hereby declare that:

My residence, post office address, and citizenship are as stated below next to my name

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

DISTRIBUTED RESOURCE RESERVATION SYSTEM FOR ESTABLISHING A PATH THROUGH A MULTI-DIMENSIONAL COMPUTER NETWORK TO SUPPORT ISOCHRONOUS DATA

the specification of which (Title of the Invention)

☒ is attached hereto
OR

☐ was filed on (MM/DD/YYYY) as United States Application Number or PCT International

Application Number and was amended on (MM/DD/YYYY) (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment specifically referred to above

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56

I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application on which priority is claimed

Prior Foreign Application Number(s)	Country	Foreign Filing Date (MM/DD/YYYY)	Priority Not Claimed	Certified Copy Attached?	
				YES	NO
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

☐ Additional foreign application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto

I hereby claim the benefit under 35 U.S.C. 119(e) of any United States provisional application(s) listed below

Application Number(s)	Filing Date (MM/DD/YYYY)	<input type="checkbox"/> Additional provisional application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

[Page 1 of 2]

Burden Hour Statement This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231

+

Please type a plus sign (+) inside this box → +

PTO/SB/01 (12-97)
Approved for use through 9/30/00 OMB 0651-0032
Patent and Trademark Office; U S DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number

DECLARATION — Utility or Design Patent Application

I hereby claim the benefit under 35 U.S.C. 120 of any United States application(s), or 365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application

U.S. Parent Application or PCT Parent Number	Parent Filing Date (MM/DD/YYYY)	Parent Patent Number (if applicable)

☐ Additional U.S. or PCT international application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

As a named inventor, I hereby appoint the following registered practitioner(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith

☐ Customer Number

OR

☒ Registered practitioner(s) name/registration number listed below

Place Customer
Number Bar Code
Label here

Name	Registration Number	Name	Registration Number
Milad G. Shara	39,367		
Howard H. Sheerin	37,938		

☐ Additional registered practitioner(s) named on supplemental Registered Practitioner Information sheet PTO/SB/02C attached hereto


Direct all correspondence to: ☐ Customer Number OR ☒ Correspondence address below

Name	Milad G. Shara				
Address	WESTERN DIGITAL CORPORATION				
Address	8105 Irvine Center Drive, Plaza 3				
City	Irvine	State	California	ZIP	92618
Country	U.S.A.	Telephone	(949) 932-5676	Fax	(949) 932-5633

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true, and further that these statements were made with the knowledge that wilful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001 and that such wilful false statements may jeopardize the validity of the application or any patent issued thereon.

Name of Sole or First Inventor: ☐ A petition has been filed for this unsigned inventor

Given Name (first and middle (if any))	Family Name or Surname
ANDREW D.	HOSPODOR

Inventor's Signature					Date	9/21/00	
Residence: City	LOS GATOS	State	CA	Country	USA	Citizenship	USA
Post Office Address	P.O. BOX 1196						
Post Office Address							
City	LOS GATOS	State	CA	ZIP	95031-1196	Country	USA

☒ Additional inventors are being named on the 1 supplemental Additional Inventor(s) sheet(s) PTO/SB/02A attached hereto

Please type a plus sign (+) inside this box → +

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number

PTO/SB/02A (3-97)
Approved for use through 9/30/98 OMB 0651-0032
Patent and Trademark Office, U S DEPARTMENT OF COMMERCE

+

DECLARATION

ADDITIONAL INVENTOR(S) Supplemental Sheet

Page 1 of 1

Name of Additional Joint Inventor, if any:

☐ A petition has been filed for this unsigned inventor

Given Name (first and middle [if any])

Family Name or Surname

MICHAEL K.

ENEBOE

Inventor's
Signature

Michael K. Eneboe

9/21/00
Date

Residence: City

SAN JOSE

State

CA

Country

USA

Citizenship

USA

Post Office Address

5379 RUCKER DR.

Post Office Address

City

SAN JOSE

State

CA

ZIP

95124

Country

USA

Name of Additional Joint Inventor, if any:

☐ A petition has been filed for this unsigned inventor

Given Name (first and middle [if any])

Family Name or Surname

Inventor's
Signature

Date

Residence: City

State

CA

Country

USA

Citizenship

USA

Post Office Address

Post Office Address

City

State

CA

ZIP

Country

USA

Name of Additional Joint Inventor, if any:

☐ A petition has been filed for this unsigned inventor

Given Name (first and middle [if any])

Family Name or Surname

Inventor's
Signature

Date

Residence: City

State

CA

Country

USA

Citizenship

USA

Post Office Address

Post Office Address

City

State

CA

ZIP

Country

USA

Burden Hour Statement This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO Assistant Commissioner for Patents, Washington, DC 20231

+

003250-033850